



HYBRID GLASS/PP AND GLASS/PA YARNS

Our lightweight reinforcement solutions for thermoplastics


Product description

Low Tex hybrid E-glass/thermoplastic yarns offered in count range from 95 to 450 Tex with a glass fibre volume fraction of 50%. These new hybrid yarns are produced from the commingling of polypropylene or polyamide filaments and glass filaments sized with a starch free system exhibiting excellent textile properties.


Main advantages

- Excellent textile properties
- Enable production of lightweight & thin prepreg fabrics & laminates
- Superior dry prepreg drapability for complex structure
- Quick & easy wet out of the thermoplastic resin during heating step
- Core impregnation of the TP resin within the glass yarn core
- Reduced cycle process steps & time for laminate production
- Improved fibre/matrix adhesion leading to higher laminate performances

Uniaxial tensile strength in 0 °C of UD laminates (MPa)

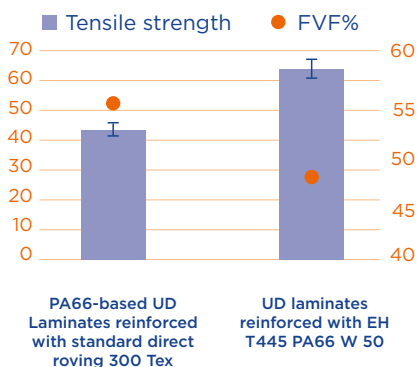

Interlaminar shearing strength of UD laminates (MPa)

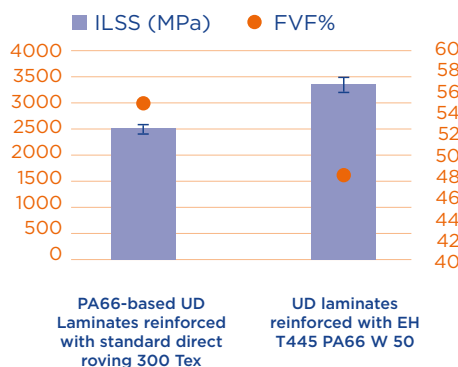

Yarn cross-section illustration



- Glass reinforcement filament
- Thermoplastic matrix filament

Packaging Information

80 bobbins per pallet

Nominal weight per pallet
 EH T95 or 105: 672 kg (1481.5 lbs)
 EH T430 or 445: 536 kg (1181.7 lbs)

Nominal bobbin weight
 EH T95 or 105: 8.4 kg (18.52 lbs)
 EH T430 or 445: 6.7 kg (14.77 lbs)

Nominal bobbin dimension
 Inside 80 mm (3.15")
 Outside 245 mm (9.65")
 Height 280 mm (11.02")



HYBRID GLASS/PP AND GLASS/PA YARNS

Our lightweight reinforcement solutions
for thermoplastics

Product Information

Reference	Unit	EH T95 PP W or B 50*	EH T430 PP W or B 50	EH T105 PA66 W 50	EH T445 PA66 W 50
Fibre volume fraction	Vol.%	50	50	50	50
Glass type		E	E	E	E
Final Count	Tex (g/km)	95	430	105	445
	Yds/lb	52,2	11,5	47,2	11,1
Glass Fibre diameter	µm	9	13	9	13
Thermoplastic resin		PP	PP	PA66	PA66
Resin color		White or Black	White or Black	White	White

*E = Type of Glass / H = Hybrid / T = Texturized / 95 = Linear density (Tex) / PP = Polypropylene /
W = White or B = Black color / 50 = Glass volume content %

Recommended storage & processing conditions

The material should be stored in its original packaging in dry conditions away from direct sunbeam. Storage temperatures of between 10 and 35 °C (50 and 95 °F) and a relative humidity of between 40 and 70 % are recommended. Though there are no known storage limitations under proper conditions, we recommend to use the material within 6 months after delivery date, or within 24 months after date of manufacture. Retesting is advised after 2 years from initial manufacture date to insure optimum performance. Before processing, the material should be conditioned by exposing it unpacked to the processing climate for at least 24 hours.



YOUR SALES CONTACT

AMERICAS

Saint-Gobain Vetrotex America
101 N. Tryon Street
Suite 663
Charlotte, NC 28246, USA
E-mail: vetrotex@saint-gobain.com

EUROPE

Saint-Gobain Vetrotex Sales Office Europe
Sokolovská 106
57001 Litomyšl, Czech Republic
Phone: +420 461 651 624
Fax: +420 461 651 596
E-mail: vetrotex@saint-gobain.com

ASIA/AUSTRALIA

Saint-Gobain ADFORS
Tour Saint-Gobain
12 place de l'Iris
92096 La Défense France
Phone: +33 1 4762 3667
Fax: +33 1 4762 3766
E-mail: vetrotex@saint-gobain.com

Please visit our website
for further information:
www.vetrotextextiles.com

DISCLAIMER: The information given in this document is based on results received from tests and experiences. Though believing in its reliability, Vetrotex does not guarantee any applicability to customers' processes and/or take over any liability arising from its application or final performance. The customer, once accepting our products like offered, accepts his responsibility for testing any application in order to check on the capabilities, before approving them for production use. Vetrotex recommends to test on the properties of any laminate when using this or any other reinforcement material. As many different factors may affect results, Vetrotex cannot make any warranty, neither clearly expressed nor indicated, including those of usability and/or suitability for any particular need or purpose. All information given in this document shall not be used as any proof or warranty, or as an inducement to infringe any patent, break any law or to offend any safety regulation.

Vetrotex reserves the right to change any information given in this document without prior notice.